



Factory Authorized Restaurant Distributor



Loren Cook Company certifies that the ACRUB, ACRUB-HP and ACRUB-XP shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



COOK





Type ACRUB, ACRUB-HP and ACRUB-XP are furnished standard with UL 705 and cUL 705 listings (Power Ventilator/ ZACT) when furnished with factory supplied motor.

120 ACRUB / ACSC

Wheel Diameter - 12"
Tip Speed (FPM) - 3.1 x RPM
Maximum RPM - 1671
Maximum BHP - .072 x (RPM/1000)³
Maximum Motor Frame - 56
Approx. Ship Wt. (Less Motor) - 61 lbs.
Roof Curb - RCG, RCA-18
Roof Opening - 15-1/2 inches

Material Gauges

Top Cap Lid - .050
Top Cap Cylinder - .040
Baffle - .063
Base - .063

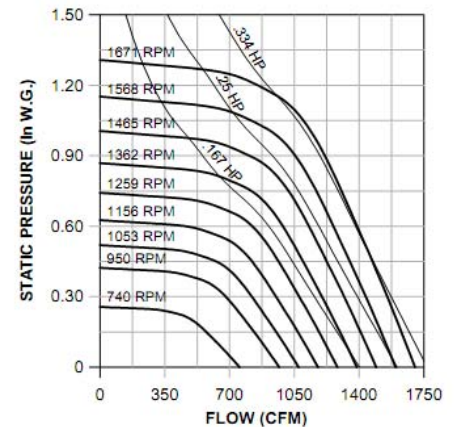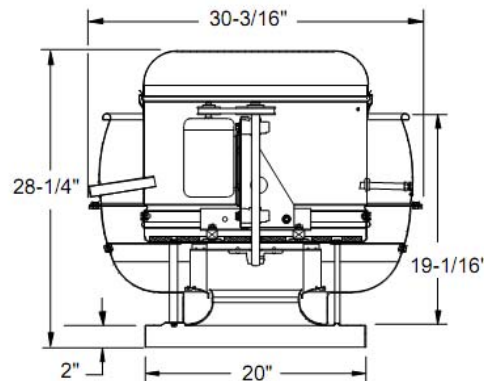

120 ACRUB / ACSC

Catalog Number	Mtr. HP/ Drv. Wt.	Fan RPM	Tip Speed	0.000" SP		0.125" SP		0.250" SP		0.375" SP		0.500" SP		0.625" SP		0.750" SP		0.875" SP		1.000" SP		1.250" SP		1.500" SP	
				Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP
120R2B 120SC2B	1/6 15 lbs.	904	2840	921		803		673																	
				5.2	.05	5.0	.05	4.4	.05																
		1037	3257	1056		955		845		722															
				7.0	.07	7.0	.08	6.5	.08	5.9	.08														
120R3B 120SC3B	1/4 15 lbs.	1170	3675	1192		1103		1008		908		788													
				9.2	.10	9.2	.11	8.9	.11	8.2	.12	7.6	.12												
				1326		1247		1163		1075		983		871											
		1302	4090	11.4	.14	11.4	.15	11.1	.16	10.7	.16	10.0	.16	9.4	.16										
120R4B 120SC4B	1/3 19 lbs.	1549	4866	1578		1511		1443		1371		1297		1222		1142		1045		869					
				14.9	.24	14.9	.25	14.9	.26	14.5	.26	14.2	.27	13.8	.27	13.5	.27	13.2	.28	12.9	.26				
		1602	5032	1632		1567		1502		1433		1361		1289		1214		1130		1015					
				15.8	.26	15.8	.27	15.8	.28	15.5	.29	15.1	.30	14.8	.30	14.5	.30	14.2	.30	13.9	.30				
120R4B 120SC4B	1/3 19 lbs.	1655	5199	1686		1623		1560		1494		1425		1355		1284		1208		1116					
				16.6	.29	16.6	.30	16.6	.31	16.3	.32	16.0	.32	15.6	.33	15.3	.33	15.0	.34	14.7	.34				