



Factory Authorized Restaurant Distributor



Loren Cook Company certifies that the REBEL shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program.



COOK




Type REBEL is furnished standard with UL 705 and cUL 705 listings (Power Ventilator/ZACT).

REBEL Dimension Data

Size	A	B	C	G	T-Sq.	Roof Opening Square*
12	14-9/16	5-1/8	28-1/4	2	20	15-1/2
16	16	6-1/8	33-1/4	2	28	23-1/2
20	18-3/8	7-1/8	43-1/4	2	32	27-1/2
24	21-5/8	9-1/8	47-1/4	3	36	31-1/2

All dimensions in inches. Weights in lbs. *Roof opening size for curbs supplied by Loren Cook Company only.

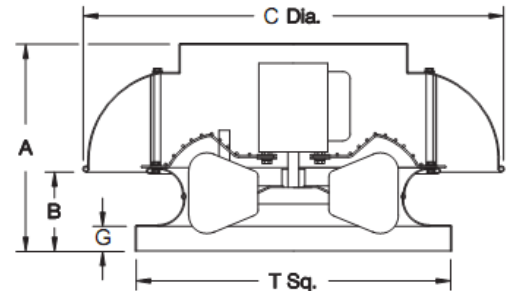

REBEL - Exhaust Performance Data

Catalog No.	Max Watts/BHP	Motor RPM	CFM vs. Static Pressure								
			0"	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"
120REBE	.07	1075	1022	840	688	457	154				
125REBE	.13	1550	1184	1056	950	847	643	569	409	179	
160REBE	.12	850	1707	1411	1145	851	644	329			
165REBE	.16	1085	1848	1593	1351	1127	909	744	412		
200REBE	.16	750	2700	1967	1415	963					
205REBE	.38	1075	3821	3359	2931	2471	2082	1671	1361	794	273
240REBE	.34	750	4665	3591	2643	2012	1391				
245REBE	.75	1075	5879	5367	4841	4289	3783	3190	2819	2486	2016

Performance shown is for Installation Type A: Free inlet, Free outlet. Speed (RPM) shown is nominal. Performance is based on actual speed of test. Performance ratings do not include the effects of appurtenances in the airstream.