



Factory Authorized Restaurant Distributor



Loren Cook Company certifies that the ACRUB, ACRUB-HP and ACRUB-XP shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



COOK





Type ACRUB, ACRUB-HP and ACRUB-XP are furnished standard with UL 705 and cUL 705 listings (Power Ventilator/ ZACT) when furnished with factory supplied motor.

135 ACRUB / ACSC

Wheel Diameter - 13.5"
Tip Speed (FPM) - 3.5 x RPM
Maximum RPM - 1574
Maximum BHP - .13 x (RPM/1000)³
Maximum Motor Frame - 56
Approx. Ship Wt. (Less Motor) - 66 lbs.
Roof Curb - RCG, RCA - 18
Roof Opening - 15-1/2 inches

Material Gauges

Top Cap Lid - .050
Top Cap Cylinder - .040
Baffle - .063
Base - .063

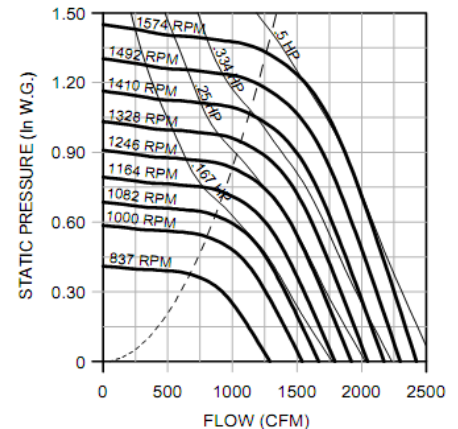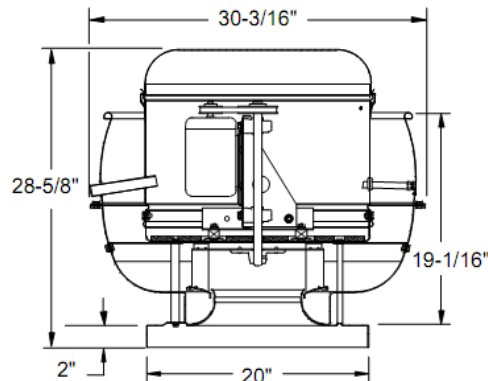

135 ACRUB / ACSC

Catalog Number	Mtr. HP/ Drv. Wt.	Fan RPM	Tip Speed	0.000" SP		0.125" SP		0.250" SP		0.375" SP		0.500" SP		0.625" SP		0.750" SP		0.875" SP		1.000" SP		1.250" SP		1.500" SP	
				Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP
135R2B 135SC2B	1/6 15 lbs.	837	2958	1289		1152		1001		676															
				5.7	.06	5.6	.07	5.0	.08	4.4	.07														
		957	3382	1474		1355		1230		1081															
				7.6	.10	7.5	.11	7.1	.11	6.5	.11														
135R3B 135SC3B	1/4 15 lbs.	1132	4000	1744		1643		1541		1432		1308		1113											
				11.0	.16	11.0	.17	10.7	.18	10.1	.18	9.5	.19	8.9	.19										
		1186	4191	1827		1731		1634		1532		1420		1275		971									
				12.2	.18	12.2	.20	12.0	.21	11.5	.21	10.8	.22	10.2	.22	9.7	.20								
135R4B 135SC4B	1/3 19 lbs.	1306	4615	1910		1819		1726		1629		1527		1406		1219									
				13.5	.21	13.5	.22	13.3	.23	12.9	.24	12.2	.24	11.6	.25	11.0	.24								
		1371	4845	2012		1925		1837		1747		1652		1548		1415		1182							
				14.7	.24	14.7	.26	14.6	.27	14.1	.28	13.6	.28	12.9	.29	12.4	.29	12.0	.28						
135R5B 135SC5B	1/2 23 lbs.	1473	5206	2112		2029		1946		1860		1772		1677		1569		1419		1130					
				15.7	.28	15.7	.30	15.7	.31	15.3	.32	14.9	.33	14.2	.33	13.8	.33	13.5	.33	13.1	.30				
		1574	5562	2269		2192		2115		2036		1955		1871		1781		1677		1538					
				17.4	.35	17.4	.37	17.4	.38	17.1	.40	16.8	.40	16.5	.41	16.1	.41	15.7	.41	15.4	.42				

Performance certified is for Installation Type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories) in the airstream. The sound ratings shown are loudness values in fan sones at 5 ft. (1.5m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for Installation Type A: free inlet fan sone levels.