



Factory Authorized Restaurant Distributor



Loren Cook Company certifies that the ACRUB, ACRUB-HP and ACRUB-XP shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



COOK





Type ACRUB, ACRUB-HP and ACRUB-XP are furnished standard with UL 705 and cUL 705 listings (Power Ventilator/ ZACT) when furnished with factory supplied motor.

195 ACRUB / ACSC

Wheel Diameter - 19.5 inches
 Tip Speed (FPM) - 5.1 x RPM
 Maximum RPM - 1353
 Maximum BHP - .85 x (RPM/1000)³
 Maximum Motor Frame - 145T
 Approx. Ship Wt. (Less Motor) - 110 lbs.
 Roof Curb - RCG, RCA - 28
 Roof Opening - 25-1/2 inches

Material Gauges

Top Cap Lid - .050
 Top Cap Cylinder - .040
 Baffle - .080
 Base - .080

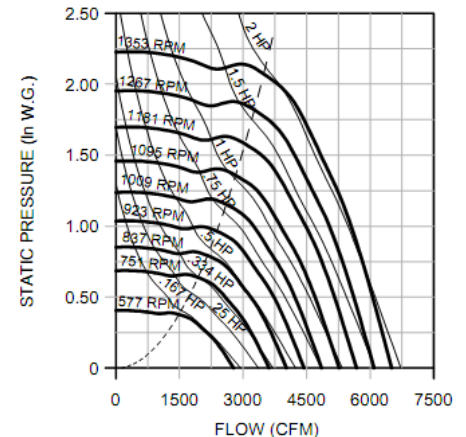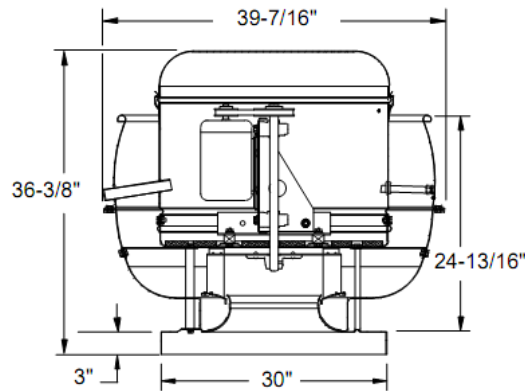

195 ACRUB / ACSC

Catalog Number	Mtr. HP/ Drv. Wt.	Fan RPM	Tip Speed	0.000" SP		0.125" SP		0.250" SP		0.375" SP		0.500" SP		0.625" SP		0.750" SP		0.875" SP		1.000" SP		1.250" SP		1.500" SP	
				Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP
195R2B	1/6	577	2945	2774		2506		2147		1510															
195SC2B	15 lbs.			6.0	.14	5.7	.15	5.0	.16	4.6	.15														
195R3B	1/4	664	3389	3192		2963		2702		2329															
195SC3B	15 lbs.			7.5	.21	7.4	.23	6.8	.24	6.3	.25														
195R4B	1/3	734	3747	3528		3323		3100		2816		2454													
195SC4B	19 lbs.			9.1	.29	9.1	.31	8.5	.32	8.0	.33	7.5	.33												
195R5B	1/2	842	4298	4047		3869		3683		3476		3214		2899		2513									
195SC5B	23 lbs.			11.9	.44	11.9	.46	11.5	.48	10.8	.49	10.3	.50	9.9	.50	9.5	.49								
195R6B	3/4	969	4946	4658		4504		4345		4178		3995		3776		3505		3231		2865					
195SC6B	31 lbs.			15.7	.67	15.7	.69	15.5	.71	14.9	.74	14.2	.75	13.8	.76	13.4	.77	12.9	.76	12.5	.74				
195R7B	1	1069	5457	5139		4999		4857		4710		4554		4384		4184		3943		3695		3009			
195SC7B	36 lbs.			19.0	.89	19.0	.92	19.0	.95	18.4	.97	17.7	1.00	17.1	1.01	16.7	1.03	16.2	1.03	15.9	1.03	15.2	.98		
195R8B	1-1/2	1149	5865	5523		5393		5262		5127		4986		4837		4674		4484		4259		3792			
				21	1.11	21	1.14	21	1.17	21	1.20	20	1.22	19.4	1.24	18.8	1.26	18.4	1.28	18.0	1.28	17.3	1.27		
195SC8B	38 lbs.	1228	6269	5903		5781		5659		5534		5405		5270		5127		4970		4791		4363		3912	
				23	1.35	23	1.39	23	1.42	23	1.45	22	1.48	22	1.50	21	1.53	21	1.54	20	1.56	19.5	1.56	18.7	1.54
195R9B	2	1290	6585	6201		6085		5969		5851		5729		5604		5472		5332		5178		4799		4386	
195SC9B	50 lbs.			25	1.57	25	1.60	25	1.64	25	1.67	24	1.70	24	1.73	23	1.75	22	1.78	22	1.79	21	1.81	21	1.80
		6504		6394		6283		6170		6056		5938		5816		5687		5550		5226		4834			
				27	1.81	27	1.85	27	1.88	27	1.92	26	1.95	26	1.98	25	2.01	24	2.03	24	2.05	23	2.09	22	2.09