



Loren Cook Company certifies that the VCR, VCR-HP and VCR-XP shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



COOK





Type VCR, VCR-HP, VCR-XP are furnished standard with UL 762 and cUL 762 listings (Power Ventilator for Restaurant Exhaust Appliances/YZHW) when furnished with factory supplied motor.

195 VCR

Wheel Diameter - 19.5 inches
Tip Speed (FPM) - 5.1 x RPM
Maximum RPM - 1353
Maximum BHP - .85 x (RPM/1000)³
Maximum Motor Frame - 145T
Approx. Ship Wt. (Less Motor) - 110 lbs.
Roof Curb - RCG, RCA - 28
Roof Opening - 25-1/2 inches

Material Gauges
Top Cap Lid - .050
Top Cap Cylinder - .040
Baffle - .080
Base - .080

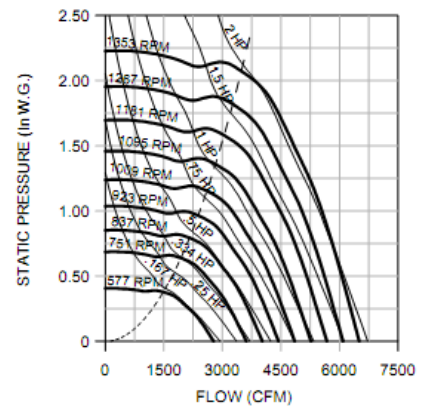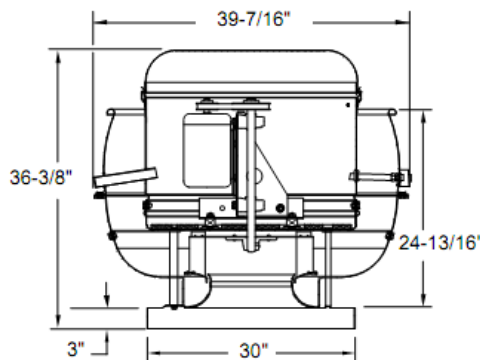

195 VCR

Catalog Number	Mtr. HP/ Drv. Wt.	Fan RPM	Tip Speed	0.000" SP		0.125" SP		0.250" SP		0.375" SP		0.500" SP		0.625" SP		0.750" SP		0.875" SP		1.000" SP		1.250" SP		1.500" SP	
				Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP
195V2B	1/6 15 lbs.	577	2945	2774	2506	2147	1510																		
				6.0	.14	5.7	.15	5.0	.16	4.6	.15														
195V3B	1/4 15 lbs.	664	3389	3192	2963	2702	2329																		
				7.5	.21	7.4	.23	6.8	.24	6.3	.25														
195V4B	1/3 19 lbs.	734	3747	3528	3323	3100	2816	2454																	
				9.1	.29	9.1	.31	8.5	.32	8.0	.33	7.5	.33												
195V5B	1/2 23 lbs.	842	4298	4047	3869	3683	3476	3214	2899	2513															
				11.9	.44	11.9	.46	11.5	.48	10.8	.49	10.3	.50	9.9	.50	9.5	.49								
195V6B	3/4 31 lbs.	969	4946	4658	4504	4345	4178	3995	3776	3505	3231	2865													
				15.7	.67	15.7	.69	15.5	.71	14.9	.74	14.2	.75	13.8	.76	13.4	.77	12.9	.76	12.5	.74				
195V7B	1 36 lbs.	1069	5457	5139	4999	4857	4710	4554	4384	4184	3943	3695	3009												
				19.0	.89	19.0	.92	19.0	.95	18.4	.97	17.7	1.00	17.1	1.01	16.7	1.03	16.2	1.03	15.9	1.03	15.2	.98		
195V8B	1-1/2 38 lbs.	1149	5865	5523	5393	5262	5127	4986	4837	4674	4484	4259	3792												
				21	1.11	21	1.14	21	1.17	21	1.20	20	1.22	19.4	1.24	18.8	1.26	18.4	1.28	18.0	1.28	17.3	1.27		
		1228	6269	5903	5781	5659	5534	5405	5270	5127	4970	4791	4363	3912											
195V9B	2 50 lbs.			23	1.35	23	1.39	23	1.42	23	1.45	22	1.48	22	1.50	21	1.53	21	1.54	20	1.56	19.5	1.56	18.7	1.54
				6201	6085	5969	5851	5729	5604	5472	5332	5178	4799	4386											
		1290	6585	25	1.57	25	1.60	25	1.64	25	1.67	24	1.70	24	1.73	23	1.75	22	1.78	22	1.79	21	1.81	21	1.80
		1353	6907	6504	6394	6283	6170	6056	5938	5816	5687	5550	5226	4834											
				27	1.81	27	1.85	27	1.88	27	1.92	26	1.95	26	1.98	25	2.01	24	2.03	24	2.05	23	2.09	22	2.09