



Factory Authorized Restaurant Distributor



Loren Cook Company certifies that the ACRUB, ACRUB-HP and ACRUB-XP shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



COOK





Type ACRUB, ACRUB-HP and ACRUB-XP are furnished standard with UL 705 and cUL 705 listings (Power Ventilator/ ZACT) when furnished with factory supplied motor.

210 ACRUB / ACSC

Wheel Diameter - 21 inches
Tip Speed (FPM) - 5.5 x RPM
Maximum RPM - 1197
Maximum BHP - $1.2 \times (\text{RPM}/1000)^3$
Maximum Motor Frame - 182T
Approx. Ship Wt. (Less Motor) - 220 lbs.
Roof Curb - RCG, RCA - 28
Roof Opening - 25-1/2 inches

Material Gauges

Top Cap Lid - .063
Top Cap Cylinder - .040
Baffle - .080
Base - .080

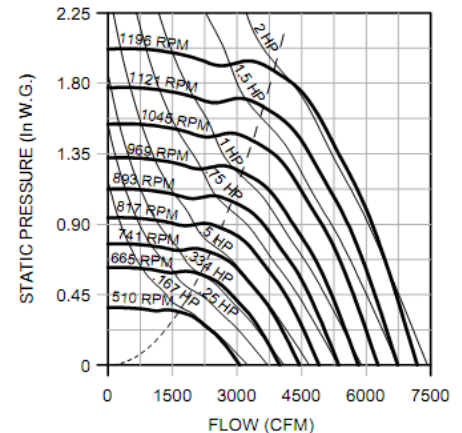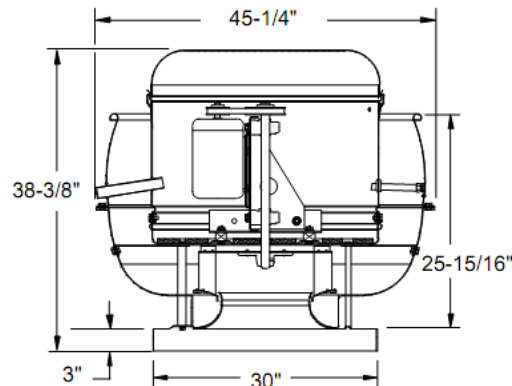

210 ACRUB / ACSC

Catalog Number	Mtr. HP/ Drv. Wt.	Fan RPM	Tip Speed	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP	0.875" SP	1.000" SP	1.250" SP	1.500" SP
				Sone BHP	Sone BHP	Sone BHP	Sone BHP	Sone BHP	Sone BHP	Sone BHP	Sone BHP	Sone BHP	Sone BHP	Sone BHP
210R2B	1/6	510	2803	3062	2734	2263								
210SC2B	15 lbs.			5.6 .14	5.2 .16	4.6 .16								
210R3B	1/4	586	3221	3518	3238	2903	2424							
210SC3B	15 lbs.			7.2 .21	7.0 .23	6.3 .24	5.9 .24							
210R4B	1/3	648	3562	3891	3639	3360	2977	2503						
210SC4B	19 lbs.			8.5 .29	8.5 .31	7.7 .33	7.2 .33	6.8 .32						
210R5B	1/2	744	4090	4467	4249	4019	3754	3400	3008					
210SC5B	23 lbs.			10.8 .44	10.8 .46	10.3 .48	9.8 .50	9.3 .50	8.8 .50					
210R6B	3/4	857	4711	5145	4957	4763	4556	4320	4021	3686	3309			
210SC6B	31 lbs.			14.3 .67	14.3 .69	14.0 .72	13.4 .74	12.8 .76	12.4 .77	11.9 .77	11.5 .75			
210R7B	1	945	5195	5674	5503	5329	5148	4952	4731	4458	4153	3844		
210SC7B	36 lbs.			17.2 .89	17.2 .92	17.2 .95	16.6 .98	16.0 1.00	15.4 1.02	15.0 1.03	14.6 1.03	14.2 1.02		
210R8B	1-1/2	1015	5580	6094	5935	5775	5608	5434	5244	5028	4766	4482	3839	
210SC8B	38 lbs.			19.8 1.11	19.8 1.14	19.8 1.17	19.3 1.20	18.7 1.23	18.1 1.25	17.6 1.27	17.2 1.28	16.8 1.28	16.1 1.24	
		1085	5965	6514	6366	6216	6063	5903	5735	5551	5342	5095	4566	3772
				23 1.35	23 1.39	23 1.42	22 1.43	22 1.49	21 1.51	20 1.53	19.7 1.55	19.3 1.56	18.6 1.55	17.9 1.48
210R9B	2	1141	6272	6851	6710	6567	6422	6273	6117	5951	5769	5561	5065	4543
210SC9B	50 lbs.			24 1.57	24 1.61	24 1.65	24 1.68	23 1.72	23 1.75	22 1.77	21 1.79	21 1.81	20 1.82	19.6 1.79
		1196	6575	7181	7046	6911	6773	6632	6486	6333	6169	5989	5549	5069
				26 1.81	26 1.85	26 1.89	26 1.93	25 1.96	24 1.99	24 2.02	23 2.05	23 2.07	22 2.09	21 2.08