



Factory Authorized Restaurant Distributor



Loren Cook Company certifies that the ACEB shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



COOK





Type ACEB is furnished standard with UL 705 and cUL 705 listings (Power Ventilator/ZACT) when furnished with factory supplied motor.

165 ACEB

Wheel Diameter - 16.5"
 Tip Speed (FPM) - 4.3 x RPM
 Maximum RPM - 1296
 Maximum BHP - .35 x (RPM/1000)³
 Maximum Motor Frame - 56
 Approx. Ship Wt. (Less Motor) - 75 lbs.
 Roof Curb - RCG, RCA 22
 Roof Opening - 19-1/2" Sq.

Material Gauges

Top Cap Lid - .050
 Top Cap Cylinder - .040
 Baffle - .063
 Base - .063

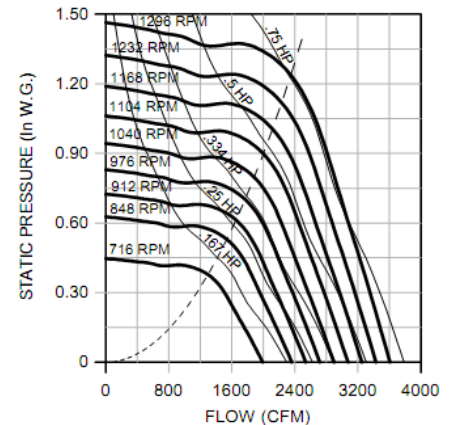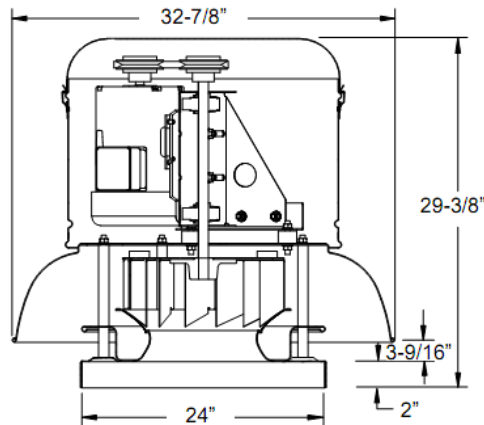

165 ACEB

Catalog Number	Mtr. HP/ Drv. Wt.	Fan RPM	Tip Speed	0.00" SP		0.125" SP		0.250" SP		0.375" SP		0.500" SP		0.625" SP		0.750" SP		0.875" SP		1.000" SP		1.250" SP		1.500" SP	
				Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP
165C2B	1/6 15 lbs.	716	3092	1994	1800	1594	1309																		
				5.8	.11	5.7	.12	5.4	.13	5.0	.13														
			771	2147	1968	1776	1573																		
165C3B	1/4 15 lbs.	829	3581	2309	2143	1965	1788	1525																	
				7.5	.17	7.5	.18	7.3	.20	6.9	.20	6.6	.20												
			887	2470	2315	2152	1986	1803																	
165C4B	1/3 19 lbs.	934	4034	2601	2454	2301	2141	1982	1746																
				9.4	.24	9.4	.25	9.3	.27	9.0	.29	8.7	.29	8.3	.29										
			981	2732	2592	2448	2295	2147	1971																
165C5B	1/2 23 lbs.	1053	4548	2933	2803	2669	2529	2388	2247	2064															
				12.2	.35	12.2	.36	12.1	.37	11.9	.40	11.6	.41	11.2	.41	10.8	.41								
			1126	3136	3014	2891	2761	2628	2499	2362	2175														
165C6B	3/4 31 lbs.	1211	5231	3373	3260	3145	3027	2904	2782	2662	2532	2360													
				16.4	.53	16.4	.54	16.4	.56	16.2	.58	16.0	.60	15.7	.63	15.3	.63	14.9	.63	14.6	.62				
			1296	3609	3504	3397	3288	3175	3060	2946	2834	2712													
				18.4	.65	18.4	.66	18.4	.68	18.3	.70	18.1	.72	17.9	.75	17.5	.77	17.1	.77	16.8	.77				