



Factory Authorized Restaurant Distributor



Loren Cook Company certifies that the ACEB shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



COOK





Type ACEB is furnished standard with UL 705 and cUL 705 listings (Power Ventilator/ZACT) when furnished with factory supplied motor.

195 ACEB

Wheel Diameter - 19.5"
Tip Speed (FPM) - 5.1 x RPM
Maximum RPM - 1348
Maximum BHP - .90 x (RPM/1000)³
Maximum Motor Frame - 145T
Approx. Ship Wt. (Less Motor) - 100 lbs.
Roof Curb - RCG, RCA 28
Roof Opening - 25-1/2" Sq.

Material Gauges

Top Cap Lid - .050
Top Cap Cylinder - .040
Baffle - .063
Base - .080

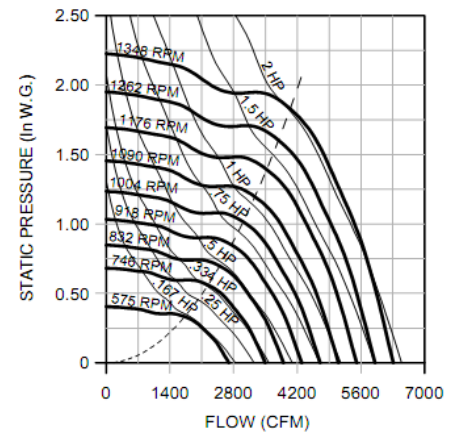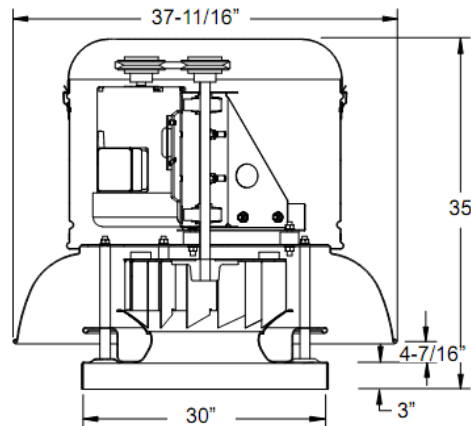

195 ACEB

Catalog Number	Mtr. HP/ Drv. Wt.	Fan RPM	Tip Speed	0.00" SP		0.125" SP		0.250" SP		0.375" SP		0.500" SP		0.625" SP		0.750" SP		0.875" SP		1.000" SP		1.250" SP		1.500" SP	
				Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP	Sone	BHP
195C2B	1/6 15 lbs.	575	2935	2692		2467		2117																	
				5.9	.14	5.7	.15	4.9	.16																
195C3B	1/4 15 lbs.	661	3374	3094		2905		2653		2301															
				7.6	.22	7.5	.23	6.9	.24	6.1	.25														
195C4B	1/3 19 lbs.	731	3731	3422		3253		3052		2763		2395													
				9.1	.29	9.1	.31	8.7	.32	7.9	.33	7.2	.33												
195C5B	1/2 23 lbs.	839	4283	3927		3781		3622		3422		3158		2862											
				11.8	.44	11.8	.46	11.5	.48	11.0	.50	10.2	.50	9.4	.50										
195C6B	3/4 31 lbs.	903	4609	4227		4092		3948		3781		3558		3307		3003									
				113.5	.55	113.5	.57	113.3	.59	112.8	.61	112.1	.62	111.4	.63	106.6	.62								
195C7B	1 36 lbs.	1066	5442	4522		4396		4264		4117		3935		3707		3470		3159							
				15.3	.67	15.3	.70	15.2	.72	14.7	.74	14.2	.76	13.4	.77	12.7	.77	12.0	.76						
195C8B	1-1/2 38 lbs.	1145	5845	4990		4876		4758		4633		4492		4317		4110		3897		3656					
				18.2	.91	18.2	.93	18.2	.95	17.9	.98	17.5	1.00	17.0	1.02	16.2	1.03	15.5	1.03	14.7	1.03				
195C9B	2 50 lbs.	1348	6881	5360		5254		5145		5032		4909		4767		4595		4399		4201		3684			
				20	1.12	20	1.15	20	1.17	20	1.20	19.7	1.22	19.3	1.25	18.7	1.27	18.0	1.28	17.3	1.28	15.9	1.26		
195C9B	2 50 lbs.	1348	6881	5730		5631		5530		5425		5315		5193		5053		4887		4702		4323		3701	
				22	1.37	22	1.40	22	1.43	22	1.45	22	1.48	22	1.51	21	1.53	20	1.55	19.8	1.56	18.5	1.56	17.3	1.51
195C9B	2 50 lbs.	1348	6881	6310		6220		6129		6036		5939		5837		5726		5603		5459		5128		4785	
				26	1.83	26	1.86	26	1.89	26	1.92	26	1.95	25	1.98	25	2.01	25	2.04	24	2.06	23	2.09	22	2.09