



ALX-UD UPBLAST DIRECT DRIVE SPUN ALUMINUM EXHAUSTERS

FEATURES


- Spun aluminum housing will not rust, chip or peel.
- Aluminum backward inclined wheel is non-overloading.
- Available with PSC or EC motors
- Variable speed PSC motors available on ALX 105/120/135
- All motors are 1 Phase 120/240V operation and can be operated at 50 or 60 Hz.
- All units can be wall mounted.
- Quick release latches for easy motor access

Ideal for exhausting air from restaurants, offices, warehouses or commercial buildings. The ALX series spun aluminum exhaust fan can be used as either a roof top or wall mount exhaust fan.



PERFORMANCE SPECIFICATIONS & CFM RATINGS

Unit	Motor			Airflow (CFM) @ Static Pressure															
	HP	Variable Speed	Max RPM	0.0"		.25"		.5"		.75"		1.00"		1.25"		1.5"		2.0"	
				High	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low
ALX120-UD033V	1/3	Y*	1650	1300	977	1100	826	1000	751	800	601	600	451						
ALX135-UD050V	1/2	Y**	1650	1600	1200	1500	1127	1400	1052	1200	901	1100	826	900	676	300	225		
ALX150-UD075S	3/4	N	1650	2200		2000		1900		1700		1500		1300		1000			
ALX165-UD150S	1 1/2	N	1650	3400		3300		3200		3000		2900		2800		2600		2200	

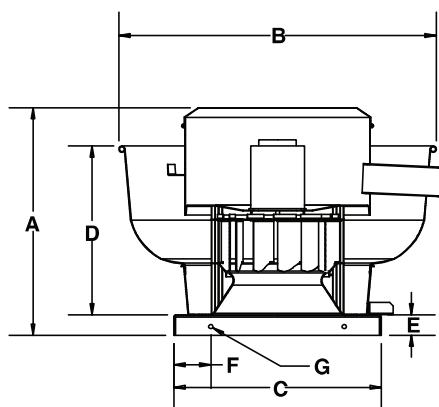

DIMENSIONS

MODEL	A	B	C**	C2	D	E	F	G Ø	Wheel Diameter	Roof Opening	Net weight
ALX120-UD/EC	19.00	25.00	19.00	21.00	13.00	1.50	3.50	0.38	12.25	15.00	37 lbs
ALX135-UD/EC	22.25	32.13	21.00	24.75	17.13	2.00	3.75	0.44	13.50	17.00	53 lbs
ALX150-UD/EC	23.13	32.13	21.00	24.75	17.13	2.00	3.75	0.44	15.00	17.00	58 lbs
ALX165-UD/EC	27.13	37.50	24.75	28.00	21.13	2.00	4.00	0.44	16.50	20.75	100 lbs

** C dimension is the base size of the fan
DIMENSIONS (INCHES)