




FG 4



FG 10

DIMENSIONAL DATA

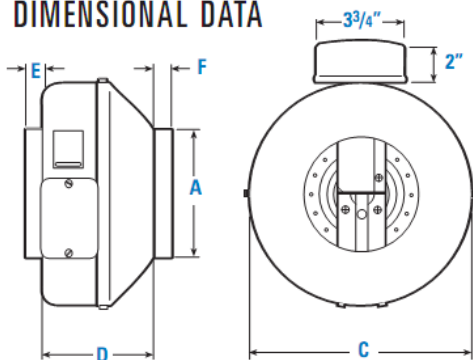

Model	A	C	D	E	F
FG 4	4	8 ³ / ₄	6 ¹ / ₂	1	1
FG 4XL	4	9 ³ / ₄	6 ¹⁵ / ₁₆	1	1
FG 5	5	8 ³ / ₄	5 ¹ / ₂	1	7 ⁷ / ₈
FG 5XL	5	9 ³ / ₄	5 ¹⁵ / ₁₆	1	1
FG 6	6	11 ³ / ₈	6	1	1
FG 6XL	6	13 ³ / ₈	6 ⁵ / ₈	1	1
FG 8	8	13 ³ / ₈	6	1 ¹ / ₈	1 ¹ / ₈
FG 8XL	8	13 ³ / ₈	6	1 ¹ / ₈	1 ¹ / ₈
FG 10	10	13 ³ / ₈	4 ¹¹ / ₁₆	1 ¹ / ₈	1
FG 10XL	10	13 ³ / ₈	5 ⁷ / ₈	1 ¹ / ₈	1
FG 12	12	16	8 ¹ / ₄	1 ¹ / ₁₆	1 ³ / ₁₆
FG 12XL	12	16	8 ¹ / ₄	1 ¹ / ₁₆	1 ³ / ₁₆

All dimensions in inches.

¹ Duct connections are 1/8" smaller than duct size.





Fantech, Inc. certifies that the models shown herein are licensed to bear the AMCA Seal. The ratings are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Performance certified is for installation type D - Ducted inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).



Look for the Energy Star Rated Models in Performance Data Chart.

AIR PERFORMANCE GRAPHS

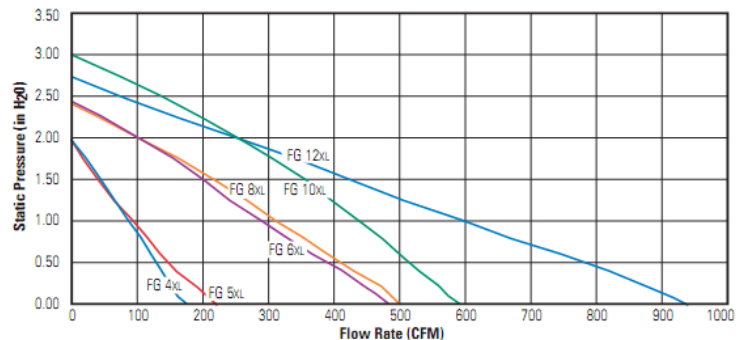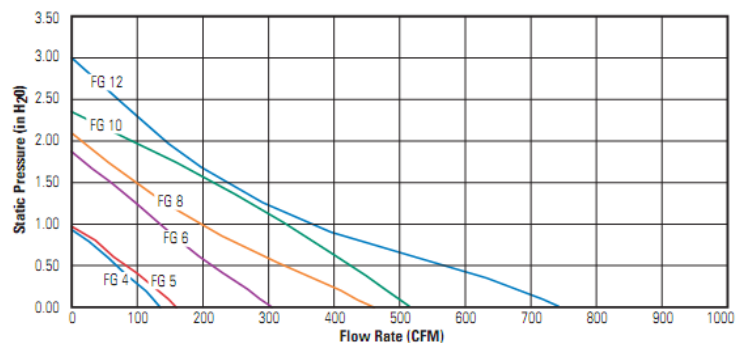

PERFORMANCE DATA

Fan Model	Energy Star	RPM	Voltage	Rated Watts	Max. Amps	Static Pressure in Inches W.G.												Max. Ps	Duct Dia.
						0"	0.1"	0.2"	0.4"	0.6"	0.8"	1.0"	1.25"	1.5"	2.0"	2.5"			
FG 4	✓	3000	120	20	0.19	135	123	110	83	55	25	–	–	–	–	–	0.94	4"	
FG 4XL	–	2750	120	71	0.66	170	160	150	134	119	103	86	63	40	–	–	1.98	4"	
FG 5	✓	3000	120	20	0.19	156	143	130	99	66	33	–	–	–	–	–	0.99	5"	
FG 5XL	–	2700	120	73	0.68	220	205	190	160	135	112	91	66	41	–	–	1.89	5"	
FG 6	✓	2700	120	72	0.68	303	287	270	232	196	164	134	97	58	–	–	1.88	6"	
FG 6XL	✓	2900	120	153	1.48	483	466	450	409	369	329	289	243	201	103	–	2.41	6"	
FG 8	✓	2550	120	119	1.14	461	435	410	351	295	243	191	143	97	–	–	2.11	8"	
FG 8XL	✓	2950	120	142	1.45	502	486	470	428	388	351	313	266	218	100	–	2.40	8"	
FG 10	✓	3000	120	138	1.43	513	497	480	444	407	366	324	269	216	89	–	2.36	10"	
FG 10XL	✓	3100	120	196	1.96	589	574	560	531	503	472	441	400	355	257	137	3.02	10"	
FG 12	✓	2600	120	181	1.87	741	711	680	601	515	434	363	290	236	146	72	2.99	12"	
FG 12XL	✓	2900	120	301	3.01	940	910	880	819	746	670	596	505	425	259	80	2.74	12"	

Performance certified is for installation type D - Ducted inlet, Ducted outlet. Speed (RPM) shown is nominal. Performance is based on actual speed of test. Performance ratings do not include the effects of appurtenances (accessories).