




COOK

HMD Make-Up Air Unit Direct-Fired

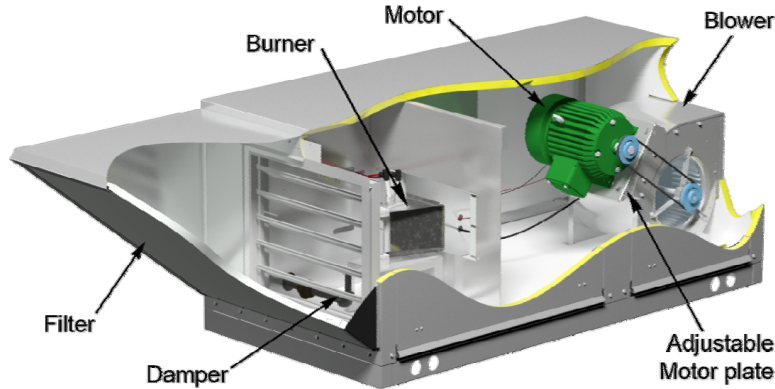

Standard Construction

- Housing constructed of minimum 18 gauge G90 galvanized steel
- Removable access panels
- Weatherization
- Cabinet lined with 1" thick 3 lb density FSK insulation
- Corrosion resistant fasteners
- Lifting points
- DWDI Forward curved steel blower mounted on vibration isolators
- Motorized intake damper
- Intake weather hood
- Permanent, 1" thick washable aluminum filter
- Cast aluminum burner with stainless steel baffles
- Redundant gas valves
- Gauges for supply and manifold gas pressure
- Intermittent direct spark ignition system
- Electronic flame modulation
- Field adjustable profile plates
- Intake air temp sensor
- Mild weather stat
- Freeze protection
- Pre-wired and pre-piped controls
- Lockable disconnect switch
- Permanently lubricated bearings rated at 200,000 hours average life
- Adjustable motor pulley adjusted to specified RPM
- Static resistant belts
- Standard motors ship factory installed

Dimensions

Dimensions (inches)

Model	HMD
A	34-1/2
B	70
C	30-7/16
D	101-1/2
E	32-3/4
F	68-3/8
G	6-3/4
H	7-7/16
J	11-1/2
K	13-1/4
Fan Weight	varies on size

