


Encore® 4" (102mm) Deck Mount Faucet with Swivel Gooseneck Spout and Lever Handles

**KL41-4x0x-SE1 Series**

- KL41-4100-SE1 3" spout, ceramic valves
- KL41-4000-SE1 3" spout, compression valves
- KL41-4101-SE1 8" spout, ceramic valves
- KL41-4001-SE1 8" spout, compression valves
- KL41-4102-SE1 6" spout, ceramic valves
- KL41-4002-SE1 6" spout, compression valves

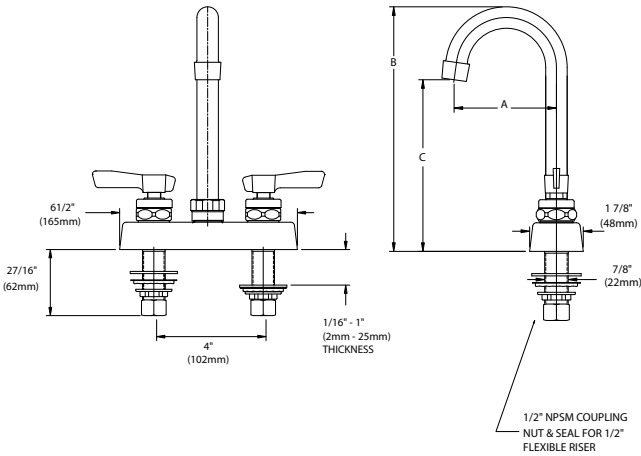

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples. 1/2" NPSM Male Inlets  
Operating Temperature: 40 - 180°F (5 - 83°C)  
Operating Pressure: 15 - 125psi

Approximate shipping weight - 5 lbs  
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality.

**Commercial Quality Features**

- Swivel gooseneck spout design
- ADA-compliant lever handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

**SANIGUARD® Product Protection**

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

**SPECIFICATIONS:**

Deck Mount Faucet to be Encore KL41 Series in the following configuration:

- \_\_\_ KL41-4100-SE1 3" spout, ceramic valves
- \_\_\_ KL41-4000-SE1 3" spout, compression valves
- \_\_\_ KL41-4101-SE1 8" spout, ceramic valves
- \_\_\_ KL41-4001-SE1 8" spout, compression valves
- \_\_\_ KL41-4102-SE1 6" spout, ceramic valves
- \_\_\_ KL41-4002-SE1 6" spout, compression valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Lever handles to be incorporated with SANIGUARD treatment. Supply inlets to be 4" on center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel swivel gooseneck style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL41-4100-SE1	3-1/2"(89 mm)	8-5/16"(211mm)	6-1/16"(154mm)
KL41-4000-SE1	3-1/2"(89 mm)	8-5/16"(211mm)	6-1/16"(154mm)
KL41-4101-SE1	8-1/2"(216mm)	12-1/16"(306mm)	6-5/16"(160mm)
KL41-4001-SE1	8-1/2"(216mm)	12-1/16"(306mm)	6-5/16"(160mm)
KL41-4102-SE1	6"(152mm)	9-3/16"(233mm)	5-1/2"(140mm)
KL41-4002-SE1	6"(152mm)	9-3/16"(233mm)	5-1/2"(140mm)

For a complete list of available options for KL41-4000 Series, see product configurator on reverse.

**COMPLIES WITH:**

ASME A112.18.1-2005  
CSA B125.1-05  
NSF/ANSI 61/9, ANNEX G  
SECTION 116875 OF THE  
CALIFORNIA HEALTH & SAFETY CODE  
(COMMONLY KNOWN AS AB1953)  
VERMONT ACT 193  
UNIFORM PLUMBING CODE



## Faucet Configuration for KL41-4000 Series

