


Encore® 8" Deck Mount Faucet with Swing Spout & Lever Handles

KL61-8xxx-SE1 Series

KL61-8106-SE1	6" Spout, Ceramic Valves
KL61-8006-SE1	6" Spout, Compression Valves
KL61-8108-SE1	8" Spout, Ceramic Valves
KL61-8008-SE1	8" Spout, Compression Valves
KL61-8110-SE1	10" Spout, Ceramic Valves
KL61-8010-SE1	10" Spout, Compression Valves
KL61-8112-SE1	12" Spout, Ceramic Valves
KL61-8012-SE1	12" Spout, Compression Valves
KL61-8114-SE1	14" Spout, Ceramic Valves
KL61-8014-SE1	14" Spout, Compression Valves
KL61-8116-SE1	16" Spout, Ceramic Valves
KL61-8016-SE1	16" Spout, Compression Valves

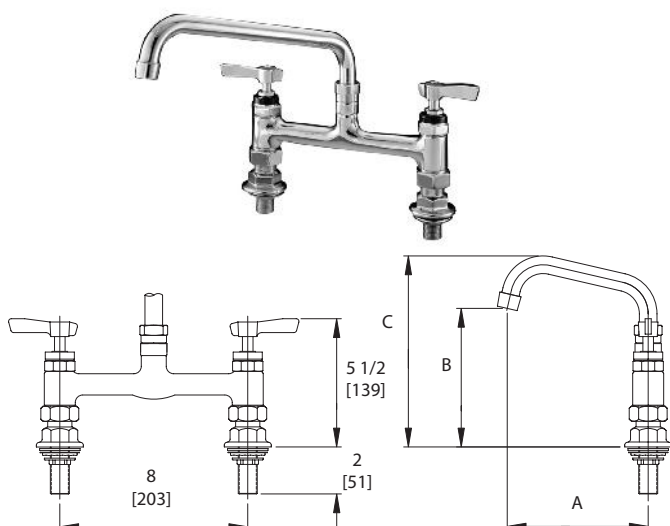

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole for deck are recommended to accommodate 1/2" supply nipples.

1/2" NPSM Male Inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs
Warranty - 2 years parts

COMPLIES WITH:
ASME A112.18.1-2005
CSA B125.1-05
NSF/ANSI 61/9, ANNEX G
SECTION 116875 OF THE
CALIFORNIA HEALTH & SAFETY CODE
(COMMONLY KNOWN AS AB1953)
VERMONT ACT 193
UNIFORM PLUMBING CODE



Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant lever handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SANIGUARD® Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

8" Deck Mount Faucet to be Encore KL61 Series
in the following configuration:

_____	KL61-8106-SE1	6" Spout, Ceramic Valves
_____	KL61-8006-SE1	6" Spout, Compression Valves
_____	KL61-8108-SE1	8" Spout, Ceramic Valves
_____	KL61-8008-SE1	8" Spout, Compression Valves
_____	KL61-8110-SE1	10" Spout, Ceramic Valves
_____	KL61-8010-SE1	10" Spout, Compression Valves
_____	KL61-8112-SE1	12" Spout, Ceramic Valves
_____	KL61-8012-SE1	12" Spout, Compression Valves
_____	KL61-8114-SE1	14" Spout, Ceramic Valves
_____	KL61-8014-SE1	14" Spout, Compression Valves
_____	KL61-8116-SE1	16" Spout, Ceramic Valves
_____	KL61-8016-SE1	16" Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Faucet to have 8" adjustable inlet centers and lever handles. Handles to be incorporated with SANIGUARD treatment. Valve to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel tubular swing style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL61-8106-SE1	6" (152mm)	3-5/16" (84mm)	5-9/16" (141mm)
KL61-8006-SE1	6" (152mm)	3-5/16" (84mm)	5-9/16" (141mm)
KL61-8108-SE1	8" (203mm)	3-13/16" (96mm)	6-1/16" (154mm)
KL61-8008-SE1	8" (203mm)	3-13/16" (96mm)	6-1/16" (154mm)
KL61-8110-SE1	10" (254mm)	4-1/4" (108mm)	6-1/2" (165mm)
KL61-8010-SE1	10" (254mm)	4-1/4" (108mm)	6-1/2" (165mm)
KL61-8112-SE1	12" (305mm)	4-11/16" (120mm)	6-15/16" (176mm)
KL61-8012-SE1	12" (305mm)	4-11/16" (120mm)	6-15/16" (176mm)
KL61-8114-SE1	14" (356mm)	5-3/16" (131mm)	7-7/16" (187mm)
KL61-8014-SE1	14" (356mm)	5-3/16" (131mm)	7-7/16" (187mm)
KL61-8116-SE1	16" (406mm)	5-5/8" (143mm)	7-7/8" (200mm)
KL61-8016-SE1	16" (406mm)	5-5/8" (143mm)	7-7/8" (200mm)