

# SPECIFIER ITEM NO. CHG PART NO.





ASME A112 18 1-2005 CSA B125 1-05 NSF/ANSI 61 / 9 Uniform Plumbing Code



Encore<sup>®</sup> Wall Mount Utility Spray Assembly KN53-2000-VB

# **ENGINEERING SPECIFICATION:**

Polished Chrome Plated Brass Wall mount faucet w/ adjustable 8" Inlet Centers One piece supply coupling 1/4 Turn Commercial Valve w/ Check Valve Lever Handle w/ SANIGUARD® treatment Stainless Steel Strain Relief - Patented S/S Flex hose w/Santoprene reinforced inner hose **O-Ring Seals – Patented** Hold open ring and hose wall hook included

### **TECHNICAL/PERFORMANCE SPECIFICATIONS:**

**Commercial Specification Grade** Gaskets and Seals Rated Compression Hot 180°F 1/2" NPT Female Inlets Operating Temperature: 40 - 180°F Operating Pressure: 15 - 125psi Handle and Grip: SANIGUARD® Treatment


# **OPTIONS:**


Handles K50-0001 **4" WRIST BLADE HANDLES** K50-X011 COSS HANDLE REPLACEMENT KIT K50-X117 CHROME PLATED DESIGNER HANDLES

#### VALVES

KN50-Y006-CCV KN50-Y007-CCV

COLD 1/4 TURN CERAMIC VALVE WITH INLINE CHECK VALVES HOT 1/4 TURN CERAMIC VALVE WITH INLINE CHECK VALVES



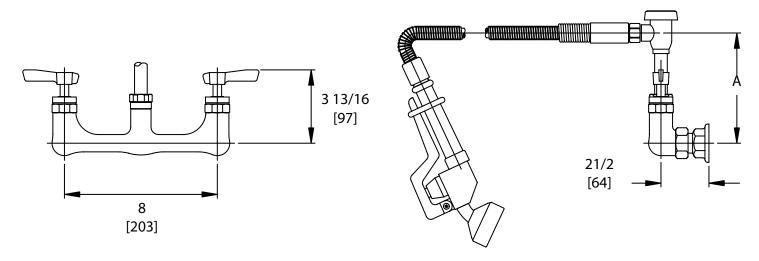

Dimensions shown in inches (mm) are for reference only and are subject to change.