


COOK



Loren Cook Company certifies that the KSPD shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program.


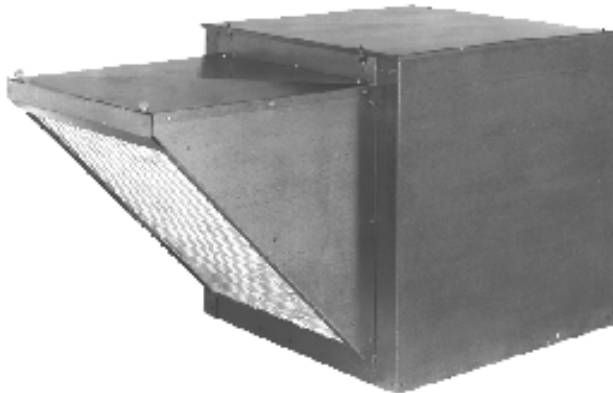


Type KSPD is furnished standard with UL 705 listing (Power Ventilator/ZACT).



Type KSPD is furnished standard with cUL listing (Power Ventilator).



122 - 127 KSPD

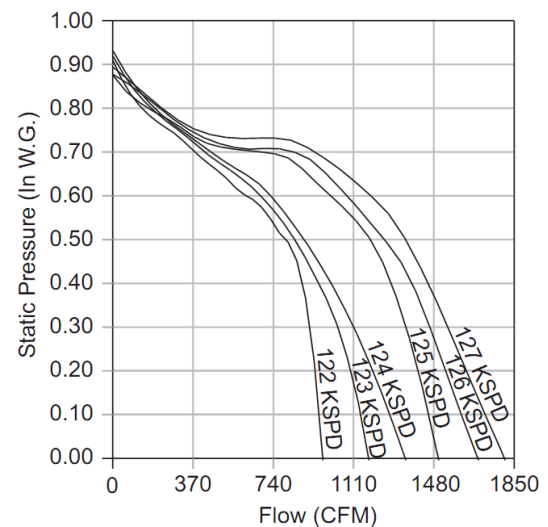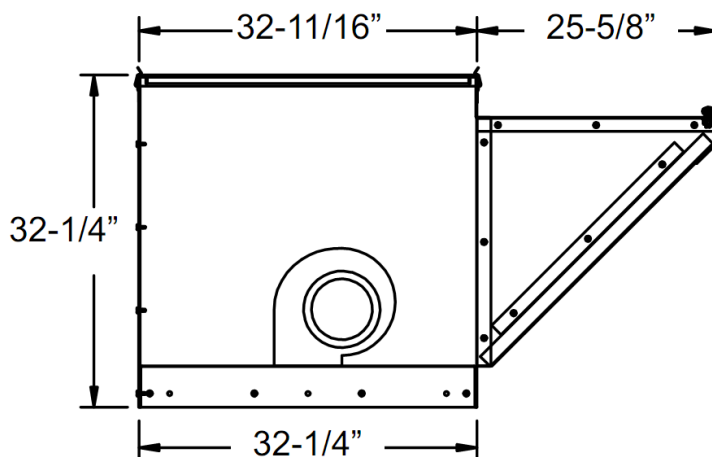

Model No.	Max Watts/BHP	RPM	0.000" SP		0.125" SP		0.250" SP		0.375" SP		0.500" SP		0.625" SP		0.750" SP	
			CFM	Sone	CFM	Sone	CFM	Sone	CFM	Sone	CFM	Sone	CFM	Sone	CFM	Sone
122	293	1,089	969	7.2	943	7.2	916	7.4	883	7.8	802	8.2	556	8.8	267	9.6
123	353	1,109	1,180	8.3	1,130	8.3	1,071	8.4	978	8.5	840	8.8	633	9.0	307	9.6
124	392	1,144	1,350	9.5	1,260	9.0	1,159	8.6	1,037	8.3	884	8.1	683	8.2	318	8.5
125	415/.284	1,039	1,504	7.6	1,421	7.3	1,374	7.5	1,313	7.7	1,188	8.0	952	8.4		
126	482/.375	1,093	1,686	9.1	1,580	8.7	1,504	8.6	1,411	8.4	1,252	8.6	1,056	8.7		
127	550/.467	1,143	1,809	10.2	1,698	9.6	1,591	9.1	1,480	8.7	1,361	8.6	1,136	8.5		



Bottom Discharge Duct Connection Dimensions

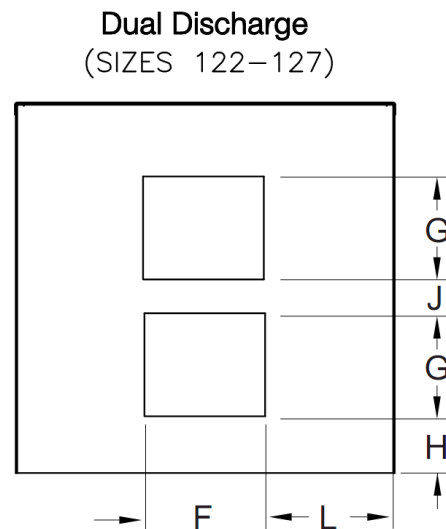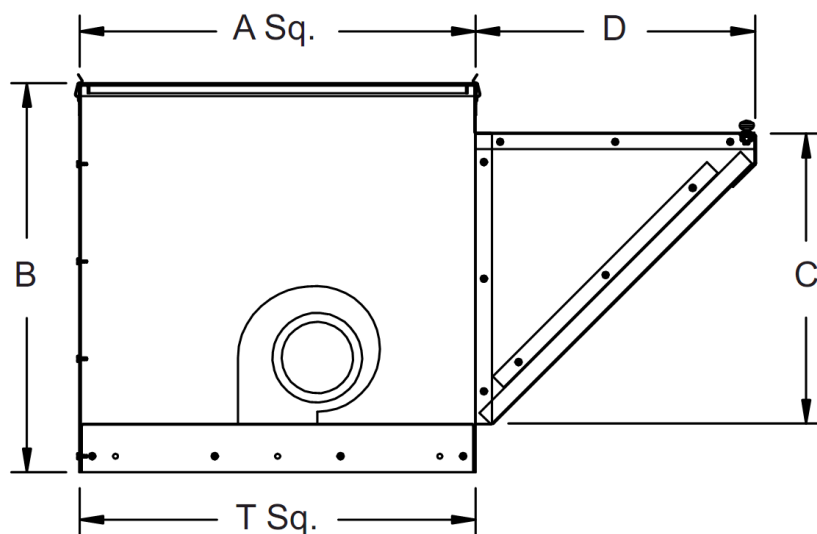

KSPD Discharge Dimension Data

Model	A Sq.	B	C (Height x Width)	D	T Sq.	Material Gauges		Approx. Ship Wt. Lbs.
						Housing	Base	
122 - 127 KSPD	32-11/16	32-1/4	26-3/16 x 26-1/2	25-5/8	32-1/4	18	16	270

KSPD Dimension Data for Outlet

Size	F	G	H	J	K	L
122-124	4-7/8	6-7/16	6-7/8	6	3-7/16	13-11/16
125-127	4-7/8	6-1/4	4-7/8	10	3-15/16	14