


Flame Gard® LED Light for Exhaust Canopy Hoods

LED-40000N 4500K-5500K (NATURAL)
 LED-40000W 3500K-4500K (WHITE)

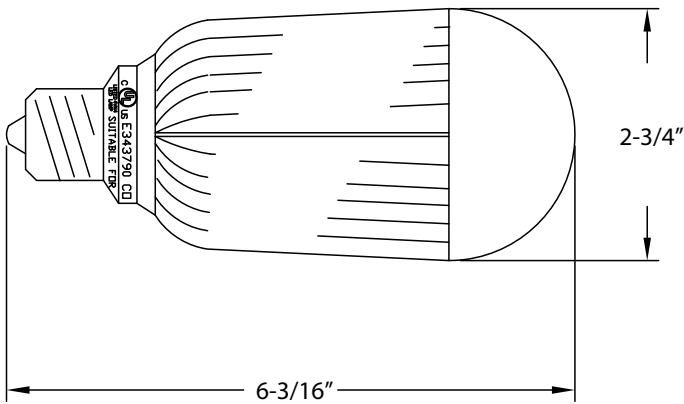

120 VAC
 Maximum Operating Temperature: 80°C (176°F)

Replacement bulb for Edison-style screw-in light fixtures

High Efficiency, Environmentally Friendly

- Only UL Listed LED bulb rated to 75°C (167°F)
 Max operating temperature 80°C (176°F)
- Replaces inefficient incandescent bulbs; low wattage for fast payback
- 12 watt bulb produces 960 lumens
- 120 degree beam angle floods the workspace with light
- Rated for 50,000 hour life – 50x standard incandescent bulb
- Mercury-free
- Instant on; no ballast to warm up
- Exceeds Federal Energy Act requirement
- Unbreakable polycarbonate enclosure
- No ultraviolet emission; will not attract insects

Easy Installation

- Simply screw in to existing fixture – no adapter required
- Fits any A19/E26/E27 fixture (existing globe must be re-installed to comply with UL listing)
- Bulb made to be used with PDI Globe L55-X022

NOTE:

Lamp housing assembly (L55-Y001) and globe (L55-X022) sold separately.



File No. E343790