

**Mixed-Flow
Inline Blower
Low Pressure
QMX**



COOK



Loren Cook Company certifies that the QMX shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.





Type QMX is furnished standard with UL 705 & cUL 705 listing (Power Ventilator/ZACT) when furnished with factory supplied motor.



Type QMX is available with UL 762 and cUL 762 listing (Power Ventilator for Restaurant Exhaust Appliances/Y2HW).



Type QMX is available with UL listing for "Power Ventilator for Smoke Control Systems."

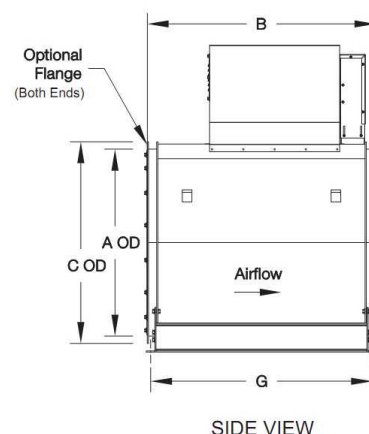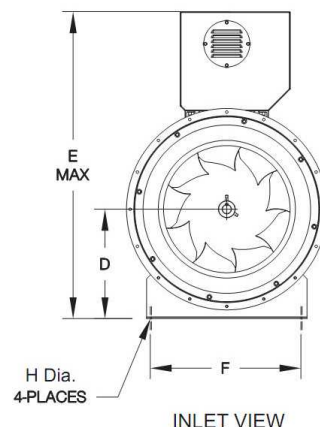

QMX Dimension Data

Size	A	B	C	D	E	F	G	H	Shaft Dia.	Max. Mtr. Frame	Ship. Wt.
90	12-13/16	19-7/8	15-15/16	8-1/2	30	12-3/8	18-3/8	1/2	1	184T	127
120	17-1/16	24	20-1/16	10-1/2	36-1/2	15-1/2	22-1/2	1/2	1-3/16	213T	186
135	19-1/4	27	22-1/4	12	39-7/16	17-1/2	25-1/2	1/2	1-3/16	213T	253
150	21-3/8	30	24-3/8	13-3/16	42-1/16	18-3/4	28-5/8	1/2	1-3/16	215T	313
165	23-1/2	33	26-1/2	14-5/16	43-3/4	20-13/16	31-5/8	1/2	1-3/16	254T	367
180	25-5/8	35	28-5/8	15-1/2	46-1/4	22-13/16	33-5/8	9/16	1-3/16	254T	416
202	28-3/4	37-1/2	31-3/4	17-1/4	49-15/16	24-1/4	36-1/8	9/16	1-7/16	256T	513
225	31-15/16	41	34-15/16	19	55-13/16	26-15/16	39-5/8	9/16	1-7/16	284T	632
245	34-3/4	44-1/2	37-3/4	20-1/2	59	28-15/16	43-1/8	11/16	1-11/16	286T	744
270	38-5/16	47	41-5/16	22-7/16	62-7/8	31	45-5/8	11/16	1-15/16	286T	873
300	42-1/2	54	45-1/2	24-3/4	68-1/16	33-3/4	52-5/8	11/16	1-15/16	286T	1090
330	46-3/4	58-1/2	49-3/4	27	74-13/16	36-3/4	57-1/8	11/16	2-3/16	324T	1340
365	51-3/4	64	54-3/4	29-13/16	80-1/4	40-1/2	63-3/8	13/16	2-7/16	326T	1770
402	56-15/16	68-1/2	59-15/16	32-11/16	88-5/16	44	67-7/8	13/16	2-15/16	364T	2220
445	63-1/16	74	66-1/16	36	94-7/8	48-1/4	73-3/8	13/16	2-15/16	365T	2730
490	69-3/8	80-1/2	72-3/8	39-7/16	103-3/8	52-3/4	79-7/8	13/16	3-7/16	404T	3330
540	76-7/16	87	79-7/16	43-5/16	110-15/16	58	86-3/8	13/16	3-7/16	404T	3860
600	84-7/8	95-1/2	87-7/8	50	122-1/16	64	94-7/8	13/16	3-7/16	404T	4780

All dimensions in inches. Weights in pounds, less motor, in a horizontal configuration.