




# GREASE INTERCEPTORS

(ALL WELDED STEEL)

\* Tested and Certified To PDI-G101

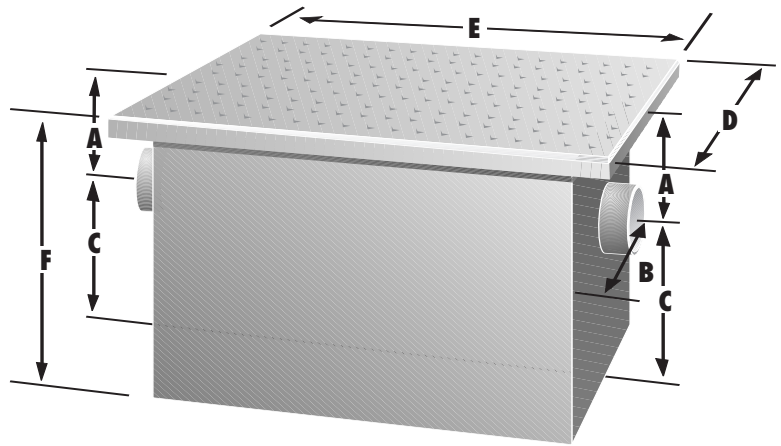

Model	Intermittent Flow GPM	Grease Capacity	Pipe Size	Top to Center of Inlet & Outlet A	Side to Center of Inlet & Outlet B	Bottom to Center of Inlet & Outlet C	Width D	Length E	Height F	Shipping Weight
RP-4	4	8lb.	2"	3.5"	5.125"	7"	13"	18"	10.5"	40lb.
RP-7	7	14lb.	2"	3.5"	5.125"	9.5"	13"	18"	13"	52lb.
RP-10	10	20lb.	2"	3.5"	6.125"	9.5"	15"	20"	13"	55lb.
RP-15	15	30lb.	2"	3.5"	7.125"	9.5"	17"	25"	13"	71lb.
RP-20	20	40lb.	3"	3.5"	8"	9.5"	18.75"	27"	13"	80lb.
RP-25	25	50lb.	3"	4.5"	8.625"	13.5"	20"	26"	18"	125lb.
RP-35	35	70lb.	4"	4.5"	8.625"	17.5"	20"	28.5"	22"	130lb.
RP-50	50	100lb.	4"	4.5"	10.625"	17.5"	24"	30"	22"	154lb.
RP-20-LO*	20	40lb.	3"	3.5"	10.125"	6.5"	23"	32"	10"	130lb.
RP-35-LO*	35	70lb.	4"	4.75"	10.125"	8.5"	23"	39"	13.25"	165lb.
RP-50-LO*	50	100lb.	4"	5"	10.125"	11"	23"	52.25"	16"	210lb.
<b>LARGE CAPACITY INTERCEPTORS</b>										
RP-75*	75	150lb.	4"	6"	12.625"	26"	28"	38"	32"	265lb.
RP-100*	100	200lb.	4"	6"	15.625"	26"	34"	42"	32"	320lb.
RP-125*	125	250lb.	4"	8"	18"	28"	36"	45"	36"	481lb.
RP-150*	150	300lb.	4"	10"	18"	30"	36"	52"	40"	518lb.
RP-200*	200	400lb.	4"	8"	21"	32"	42"	61"	40"	643lb.
RP-250*	250	500lb.	4"	9"	21"	54"	42"	61"	63"	969lb.
RP-300*	300	600lb.	4"	9"	27"	44"	54"	71"	53"	1,124lb.
RP-350*	350	700lb.	6"	9"	27"	54"	54"	71"	63"	1,265lb.
RP-400*	400	800lb.	6"	8"	28.5"	53"	57"	86"	61"	1,400lb.
RP-450*	450	900lb.	6"	8"	28.5"	54"	57"	86"	62"	1,475lb.
RP-500*	500	1000lb.	6"	8"	28.5"	55"	57"	86"	63"	1,500lb.

**Job Specification:** Grease interceptors shall be Rockford Interceptors as manufactured by Rockford Sanitary Systems, Inc., Rockford, Illinois, and as noted on plans.

**Interceptor Specifications:** Furnish \_\_\_\_\_ Rockford Model **RP-**\_\_\_\_\_ PDI listed (thru 50 GPM only) all-welded steel interceptors for on-the-floor, partially recessed, or flush-with-floor installation, \_\_\_\_\_ g.p.m. intermittent flow, \_\_\_\_\_ lb. grease capacity, \_\_\_\_\_" no-hub inlet and outlet connections, flow control device, removable nonskid diamond treadplate cover for flush-with-floor installation suitable for pedestrian traffic or reinforced for light traffic, secured with stainless steel flat head screws, heavy-duty leakproof gasket. Units are furnished standard with enamel coating inside and outside. Supplied standard with air relief bypass. Bituminous coating outside for recessed installation optional at **no extra charge**.

**Optional Features:** Tapped inlet/outlet connections, epoxy coating, integral extensions, and stainless steel construction.