




900 SERIES

Double Width, Double Inlet, Framed Heavy Duty Blowers - with Pillow Block Bearings

WITH
MOTOR &
DRIVES

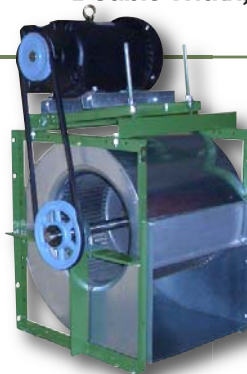



**TWIN
UNIT
AVAILABLE**

Call for
pricing & availability.

FEATURES

- Pillow block bearings mounted on "T" bar support.
- Corrosion resistant galvanized blower housing.
- Available as single and twin assemblies.
- All wheels capable of running at AMCA Class II operating conditions with appropriate shaft and bearings.
- Welded angular steel blower frames with T bar supports under bearings when used in bottom horizontal discharge (BHD) mounting position. Suitable for operation in top horizontal discharge (THD), upblast (UB) or downblast (DB) discharge position.
- Frames and bearing supports are baked powder coat finished.
- Pre-lubricated cast iron pillow block ball bearings with grease fitting suitable for operating in ambient temperatures from -30 to +230° F.
- Shaft extensions keywayed both ends suitable for single or double groove pulleys.
- Corrosion inhibiting shaft coating.
- Units skidded for shipment.

DIMENSIONS

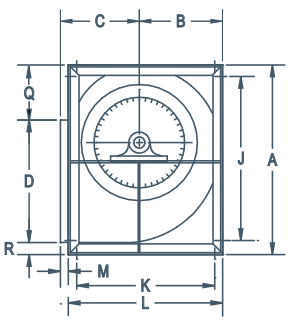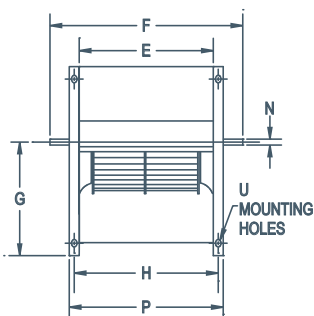

MODEL	A	B	C	D	E	F (See Note)	G	H	J	K	L	M	N (See Note)	P	Q	R	U	UNIT WEIGHT (LBS) (without motor & drives)
907	14 3/8"	6 7/16"	6 1/16"	8 1/4"	9 3/16"	17 3/16"	8 5/8"	10 3/8"	11 5/8"	9"	11 3/4"	3/4"	3/4"	11 3/8"	4 5/8"	1 1/2"	7/16 x 5/8	22
909-7	17 1/4"	7 15/16"	7 5/16"	10 1/4"	9 3/16"	17 3/16"	10 1/8"	10 3/8"	14 1/2"	11 3/4"	14 1/2"	3/4"	3/4"	11 3/8"	5 1/2"	1 1/2"	7/16 x 5/8	27
909	17 1/4"	7 15/16"	7 5/16"	10 1/4"	11 13/16"	19 13/16"	10 1/8"	14 1/2"	11 3/4"	14 1/2"	3/4"	3/4"	3/4"	13 15/16"	5 1/2"	1 1/2"	7/16 x 5/8	32
910-8	19 1/8"	9"	8"	11 3/8"	10 1/2"	18 1/2"	11 1/4"	11 5/8"	16 1/2"	13 3/8"	16 1/4"	3/4"	3/4"	12 5/8"	6 1/4"	1 1/2"	7/16 x 5/8	35
910	19 1/8"	9"	8"	11 3/8"	13 1/8"	21 5/8"	11 1/4"	14 1/4"	16 1/2"	13 3/8"	16 1/4"	3/4"	1"	15 1/4"	6 1/4"	1 1/2"	7/16 x 5/8	43
912-9	22 1/4"	10 5/8"	9 1/8"	13 7/16"	12 1/4"	20 3/4"	13"	13 3/8"	19 5/8"	16 1/4"	19"	3/4"	1"	14 3/8"	7 5/16"	1 1/2"	7/16 x 5/8	48
912	22 1/4"	10 5/8"	9 1/8"	13 7/16"	15 5/8"	24 1/8"	13"	16 3/4"	19 5/8"	16 1/4"	19"	3/4"	1"	17 3/4"	7 5/16"	1 1/2"	7/16 x 5/8	59
915-10	26"	12 9/16"	10 5/16"	15 7/8"	14 11/16"	23 3/16"	15 1/4"	15 13/16"	23 3/8"	19 3/8"	22 1/8"	3/4"	1"	16 13/16"	8 5/8"	1 1/2"	7/16 x 5/8	62
915	26"	12 9/16"	10 5/16"	15 7/8"	18 5/8"	27 1/8"	15 1/4"	19 3/4"	23 3/8"	19 3/8"	22 1/8"	3/4"	1"	20 3/4"	8 5/8"	1 1/2"	7/16 x 5/8	76
918-13	30 3/4"	14 15/16"	12 3/8"	18 7/8"	17 3/8"	27 1/8"	17 3/4"	19"	29"	24 1/2"	26 1/2"	3/4"	1 3/16"	20 1/2"	10 3/8"	1 1/2"	7/16 x 5/8	120
918	30 3/4"	14 15/16"	12 3/8"	18 7/8"	21 7/8"	34"	17 3/4"	23 1/2"	29"	24 1/2"	26 1/2"	3/4"	1 3/16"	25"	10 3/8"	1 1/2"	7/16 x 5/8	115
920-18	38"	18 5/16"	14 7/16"	24 3/4"	22 3/4"	36"	22 9/16"	24 1/4"	32 1/4"	25 1/2"	31 1/4"	1 1/2"	1 3/16"	26 3/4"	11 1/4"	2"	5/8"	202
920	38"	18 5/16"	14 7/16"	24 3/4"	24 3/4"	37 1/4"	22 9/16"	26 1/4"	32 1/4"	25 1/2"	31 1/4"	1 1/2"	1 3/16"	28 3/4"	11 1/4"	2"	5/8"	202
922	41 1/2"	20 1/16"	15 11/16"	27 1/4"	27 1/4"	39 3/4"	24 5/8"	28 3/4"	35 3/4"	28 1/2"	34 1/4"	1 1/2"	1 3/16"	31 1/4"	12 1/4"	2"	5/8"	226
925	46 3/4"	22 5/8"	17 1/4"	31 1/4"	31 1/4"	43 3/4"	27 3/4"	32 3/4"	41"	32 3/4"	38 3/8"	1 1/2"	1 3/16"	35 1/4"	13 1/2"	2"	5/8"	276
927	51 1/2"	25 1/16"	19 1/8"	34 1/4"	34 1/4"	50 1/4"	30 1/4"	35 3/4"	46 1/2"	37 11/16"	42 11/16"	1 1/2"	1 11/16"	38 1/4"	15 1/4"	2"	5/8"	400
930	55 1/2"	27 1/16"	20 5/16"	36 3/4"	36 3/4"	52 3/4"	32 5/8"	38 1/4"	50 1/2"	40 7/8"	45 7/8"	1 1/2"	1 11/16"	40 3/4"	16 3/4"	2"	5/8"	505
933	59 3/4"	29 1/8"	24 5/8"	42 15/16"	39 3/4"	58 3/4"	34 1/4"	41 3/4"	54 3/4"	47 1/4"	52 1/4"	1 1/2"	2 3/16"	43 3/4"	14 13/16"	2"	5/8"	610
936	59 3/4"	29 1/8"	24 5/8"	42 15/16"	42 3/4"	61 3/4"	34 1/4"	44 3/4"	54 3/4"	47 1/4"	52 1/4"	1 1/2"	2 3/16"	46 3/4"	14 13/16"	2"	5/8"	685

NOTE: "F" Dimension may vary among optional shaft diameters. Standard shaft sizes shown. Larger diameter shafts available.
All wheels can run safely at AMCA Class II operating conditions with appropriate shaft & bearings.

ACCESSORIES

- Models 907 to 915 - Motor mounting bracket with mounting and belt tension adjusting hardware.
- Models 912 to 936 - 1 to 15 HP motor platform with mounting hardware.
- Models 918 to 936 - 20 to 50 hp motor platform with mounting hardware.

< OPTIONAL 1 TO 15 HP MOTOR PLATFORM

For more information on motor platforms, see page J5 in Accessories & Motor tab.

