

Fire Resistant Wrap For Duct Insulation



Features


- 2-hour fire rated flexible duct wrap
- Thin and lightweight at nominal thickness of 1-1/2" (38 mm) and density of 6 PCF (96kg/m³) contains low bio persistent fibers
- A proven alternative to fire rated shaft
- Tested and listed with Intertek per ASTM E2336, UL 2221, ULC S144, ISO 6944
- Meet the requirements of IBC, IMC, UMN, NFPA and other life safety codes.
- Available in:
24"x25ft.(50 ft²) | 609.6 mm x 7.62m (4.645 m²)
48"x25ft.(100 ft²) | 1219.2 mm x 7.62m (9.29 m²)

Advantages

- Approved as zero clearance system to combustibles
- The only system that is certified for 2 & 3 sides application
- Butted inner layer in 2-layer applications
- Tested to both Horizontal & Vertical ducts
- High flexibility for fast, space-saving and easy installation compared to traditional
- Good sound absorption

Applications

- **Commercial kitchen grease ducts**, per ASTM E2336 providing 2 hour protection with a 2-layer system
- **Stair pressurization, air & ventilation ducts**, per ISO 6944 Type A providing up to 2 hour protection with a 1 layer system

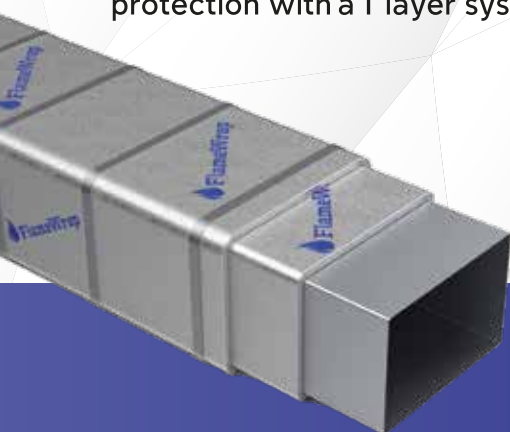

** Please refer to Intertek BP online directory for full certification details.

EFS Engineering | Office@efs-company.com | www.efs-company.com